Soda Pendant



DESCRIPTION

Sleek glass shade infused with bubbles, suspended from a round canopy. Black, satin nickel, and white canopy options highlighted with clear cable; antique bronze highlighted with brown cable.Includes 120 volt, 75 watt or equivalent A19 medium base lamp or 32 watt GX24Q-3 base triple tube compact fluorescent lamp (electronic ballast included). Fixture is provided with six feet of field-cuttable cable. Incandescent version dimmable with standard incandescent dimmer.

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.

OTHER

TD includes 4.5" Round Canopy.
Antique Bronze and Black Finish Only Available on TD.
CF277 Lamp Only Available on TD.

ACCESSORIES & OPTICAL CONTROLS


Line-voltage Swag Hook

WEIGHT

2.9lb / 1.32kg ±





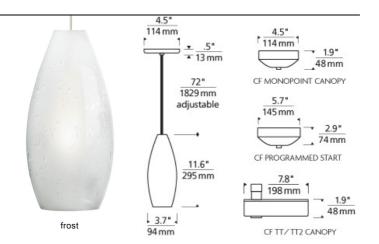

ORDERING INFORMATION

700 sys	TEM SDALP	COLOR	FINISH	LAMP	
ΤD Π ΤΤ2	LINE-VOLTAGE PENDANTS/SUSPENSION SINGLE-CIRCUIT T-TRAK TWO-CIRCUIT T~TRAK	A AMBER F FROST	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE	INCANDESCENT 120V -CF COMPACT FLUORESCENT 120V -CF277 COMPACT FLUORESCENT 277V -PSUNV COMPACT FLUORESCENT PROGRAMMED START 120V-277V	RT 120V-277V

For use on Halo*, Juno* or Lightolier* 120 volt single-circuit track, order as follows:

Incandescent: Order pendant as 700TD and order appropriate 120V Track Adapter

Compact Fluorescent: Substitute 700TD with one of the following: 700TH (fits Halo*), 700TJ (fits Juno*) or 700Tl (fits Lightolier*) and by substituting the finish with one of the following: **BZ** (Black/Antique Bronze), **BS** (Black/Satin Nickel), **WZ** (White/Antique Bronze) or **WS** (White/Satin Nickel).

*Tech Lighting is not affiliated, nor is it endorsed by any of the companies listed nor does Tech Lighting distribute any of their products.



Tech Lighting, L.L.C.

700 S	SDALP
FIXTURE TYPE:	
JOB NAME:	
NOTES:	



©2015 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.