

Job Name:

Contact:

Ordering Code:

Fixture Type:

## London







#### Description


Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design.

It is offered in matte chrome, chrome or bronze and is compatible with any Bruck line voltage track as well as Halo® single circuit for retrofit. Chrome and matte chrome finish provided with clear cord. Bronze finish provided with black cord. The pendant can be mounted from Bruck's field adjustable 4" Kiss Canopy and accepts CLF or medium base lamping options. Standard overall cable length of 59" can be field-cut or specified when ordering.

#### **Ordering Codes**

Follow the steps to specify your fixture,

example: 110 - 824 - bz - IN - MP

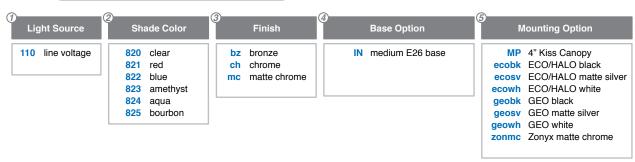




Job Name:

Contact:

Ordering Code:

Fixture Type:











**Light Source** 

110 - IN - line voltage (E26)

#### Performance

LED · lamp dependent CCT

CRI LIFE

#### **Technical Specs**

Socket Listing · medium E26 base socket

- ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)
  • cETL Listed to CSA C22.2 #250.0 and
- #9.0

#### Mounting

4" Kiss Canopy

- 120VAC input
- 100W, 100VA (max 100W lamp)
- Dimmable (with compatible lamp)
  Mount to 3" 4" round J-Box

Line Voltage Track

- 120VAC input
   100W, 100VA (max 100W lamp)
   Dimmable (with compatible lamp)
- Connects to line voltage adapter (ECO, GEO, Zonyx)

#### Warranty

• 1 year limited fixture warranty







Made in the USA - meets the requirements of the Buy American provision within the ARRA



Job Name:

Ordering Code:

Fixture Type:

Contact:

# Vintage LED Lamps for E26 base sockets



- · Amber Glass Lamp with Thread LED
- Integrated Driver-Free System
- · Suitable for Damp Locations
- Smooth Dimming System\*
- · 25,000 Hours Warranty
- Silicone Coated
- · 95% Energy Savings

\*Compatible with most electronic low voltage (ELV) dimmers








### **LED Globe Lamp**





Ordering Codes

Follow the steps to specify your fixture,

example:

LMP-G2518022K1

Ordering Code	Туре	Base	Lumen	Wattage /EQV	MOL	MOD	CCT <sup>2</sup>
LMP-G4030022K1	G40	E26	300lm	3.5W / 60W	7.0"	5.0"	2200K
LMP-G2518022K1	G25	E26	180lm	2.0W / 40W	4.5"	3.15"	2200K

## **LED Edison Lamp**





Ordering Codes

Follow the steps to specify your fixture,

example:

LMP-ED2118022K1

	IOL MOD	CCT <sup>2</sup>
LMP-ED2118022K1         ST21         E26         180lm         2.0W / 40W	2.45"	2200K

## **LED Tubular Lamp**





**Ordering Codes** 

Follow the steps to specify your fixture,

example:

LMP-TB930022K1

Ordering Code	Туре	Base	Lumen	Wattage /EQV	MOL	MOD	CCT <sup>2</sup>
LMP-TB930022K1	Т9	E25	300lm	3.5W / 60W	11.87"	1.15"	2200K