
Porcelain Steel Markerboard




with Ultra Trim





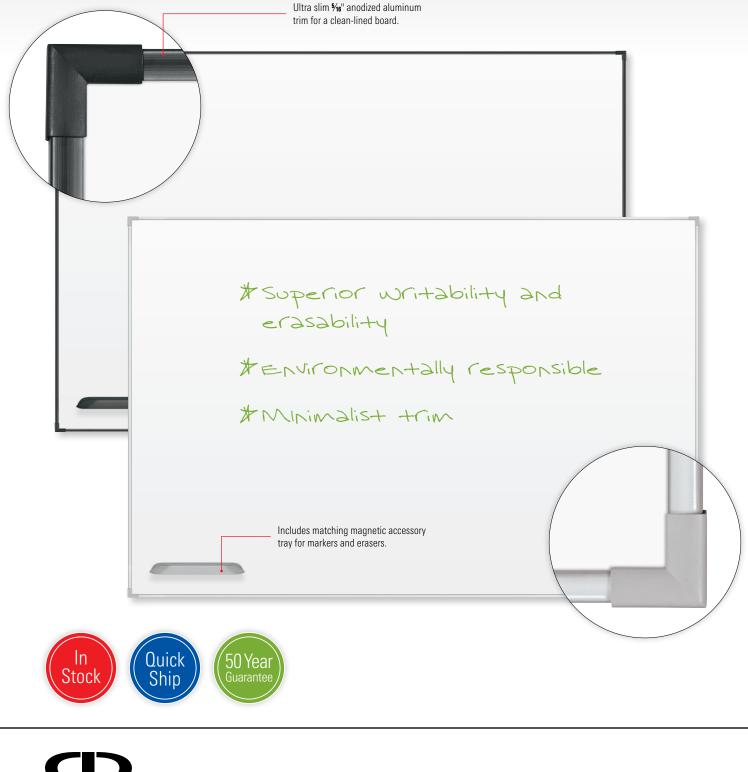

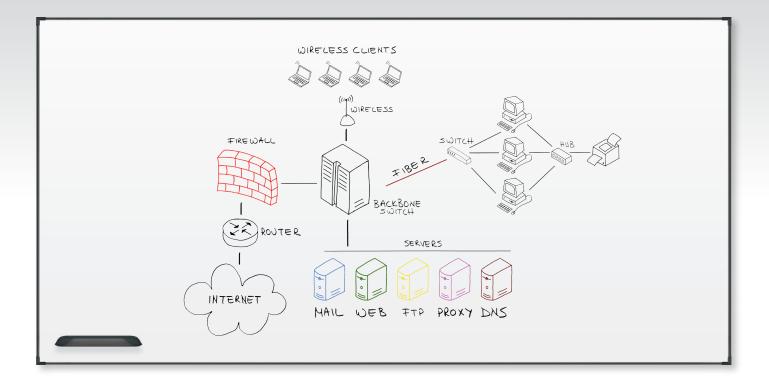



Porcelain Steel Markerboard with Ultra Trim

- Magnetic porcelain steel markerboards are engineered for superior color contrast with dry erase markers.
- Low gloss porcelain dry erase surface provides superior writability and erasability with no ghosting. Reduced surface light distortion enhances visibility to provide optimum eye comfort.
- Steel surface is permanently laminated to a particle board substrate for stability and durability.
- Featured with Ultra Trim for a modern, clean-lined board. Trim is a low profile %e" anodized aluminum, available in silver or black. Includes matching Magnetic Q-Tray for markers and erasers.
- Class A Fire Rated board. A full test report copy is available upon request.
- Cradle to Cradle Certified^{CM} Silver, GREENGUARD Indoor Air Quality Certified[®] and GREENGUARD Children & Schools CertifiedSM. Certified boards incorporate material healthfulness, material reutilization, renewable energy use, water stewardship and social responsibility.
- Made in the USA. TAA compliant. 50 year guarantee.

Silver	Black	Dimensions	Ship Wt.
2029A*	2028A*	1 1⁄2'H x 2'W	10 lbs
2029B*	2028B*	2'H x 3'W	20 lbs
2029C**	2028C**	3'H x 4'W	36 lbs
2029D	2028D	4'H x 4'W	69 lbs
2029E	2028E	3'H x 5'W	70 lbs
2029F	2028F	4'H x 5'W	84 lbs
2029G	2 028G	4'H x 6'W	94 Ibs
2029H	2028H	4'H x 8'W	120 lbs
2029K	2 028K	4'H x 10'W	146 lbs
2029M	2028M	4'H x 12'W	194 lbs
2029P	2028P	4'H x 16'W	243 lbs

Made in the USA.

*Ships UPS **Ships UPS OS1

Due to shipping restrictions, boards listed as 3'H x 4'W actually measure 33 **¾**"H x 48"W. Cradle to Cradle Certified[™] is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

Technical Specifications

- Multipurpose magnetic surface with superior writability and erasability for dry erase markers. Superior contrast and reduced surface light distortion minimizes glare for optimum eye comfort.
- A precisely balanced porcelain enamel ground coat is furnace-fused to both sides of 28 gauge (standard) or 24 gauge (custom) steel.
- The first furnace fuses a ground coat of enamel that is heat-softened at approximately 1450° F. The second furnace firing fuses a coat of enamel to the ground coat enamel. Color Fusion ceramic top coat is applied providing the desired surface color.
- A fade resistant waterproof resin glue bonds the porcelain to a moisture-resistant core and .005" polyester foil backer sheet. Also available with upgraded sheet aluminum backer. Custom sizes are available. Off-white is standard.



Balt® & Best-Rite® are brand divisions of MooreCo Inc.

2885 Lorraine Ave | Temple, TX 76501 p: 800.749.2258 | f: 800.697.6258

www.moorecoinc.com