


BROADWAY

FR41431PAL

Bulbs: 60W G9

Replacement Parts: GLASS: R41430GL

[DRAWING 1]

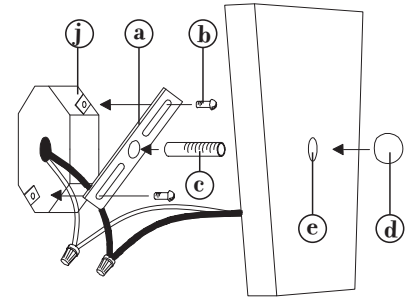

ASSEMBLY INSTRUCTIONS


Assembly of this fixture will be accomplished by first installing the mounting hardware to the junction box, making all necessary electrical connections, mounting the backplate to the wall and then lamping the fixture.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1

- 1 Prepare mounting strap (a) by threading nipple into the center hole of the mounting strap (a), approximately 1/4" - see Drawing 2.
- 2 Attach mounting strap (a) to junction box (j) using two screws (b) provided.
- 3 NOTE: This fixture can also be mounted on the ceiling. The installation procedure as the same as mounting the fixture to the wall.

[DRAWING 2]

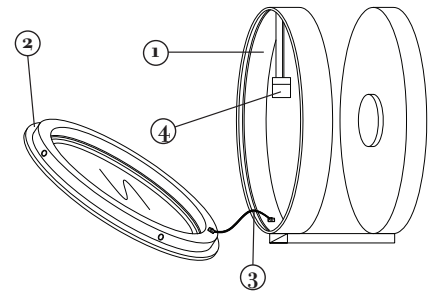


STEP 2 Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

STEP 3

- 1 To mount backplate to wall, slip center hole of backplate (e) over nipple (c) and hold fixture in position - see Drawing 2.
- 2 Thread decorative knob (d) onto end of nipple (c) and tighten to secure fixture.
- 3 Fixture can now be lamped accordingly.

[DRAWING 3]



STEP 4

- 1 To lamp fixture remove glass retainer ring (2) from main body (1). NOTE: the glass retainer ring is held in position by spring tension and can be easily removed by pulling firmly on the edge at the split line. Retainer ring is attached to the fixture by a wire cable (3) and will not fall when released - See Drawing 2.
- 2 Lamp fixture with bulbs provided and replace retainer ring by snapping in back in place.

STEP 5

- 1 Glass is held in glass retainer ring by a "C" shape spring ring (r). To remove, replace, or install glass it is necessary to pinch the two short tabs (t) of the ring together, after glass is installed ring can be replaced in same manner - see Drawing 3.



FREDRICK RAMOND
ESTABLISHED 1965

800.421.3517 WWW.FREDRICKRAMOND.COM

4.6.09